


TT1N ?????????? ?????? ?????????????? ??? ??????????

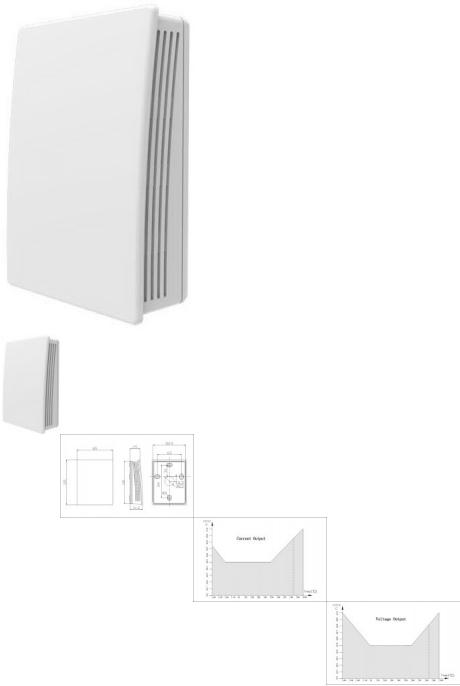

? ?????????? ??????????
4..20mA, 0-10V, 0-5V

?????????: ??? ???? ??????????
?????
4555,96 ???

[?????? ??????? ?? ???????](#)

?????????

[??????????????](#)

- o ?????????? ?????????????? ????????? ? ??????????
- o ?????????????????????????? ?????????? ?????????? ?????????????????? ????????? ??????????????, ?????????? ????????? ? ?????????????? ????? ?????????
- o ?????????????? ?????? ?????????, ????????? ?? ?????????????????? ? ?????????? ??????????????, ?????????????? ? ??????????????????????????
- o ?????????? ?????????, ????????? ??????????????
- o ?????????? ?????????? ?????????? ???????????????

[?????????????????](#)

????????:	PT1000, ?????? A
?????????:	??, ???????
??????:	4..20mA (2-? ??????????) ??? 0-10VDC, 0-5VDC
???. ??????????:	? 500 ? (???), ? 2K ? (?????????? 0-10VDC), ? 1K? (?????????? 0-5VDC)
?????????:	< ±0.5°C, ??, ??????? ??????????

???????: ??? 18.5-35VDC (R?????.=500?), 8.5-35VDC (R?????.=0?)
????????????? 15-35VDC, 15-28VAC
????????????? ??????????: 0..70°C, 0..95%RH (??? ??????????????)
????????? -30..70°C
????????? ?????????????????? ABS
?????: 116 ?
????????: IP30

???????

??????	TT1N		????????? ??????????
			?????? ?????????????? /
			?????????????
?????		1	0-10VDC
		2	4..20mA
?????????			0-50°C
		1	0-100°C
		2	

* ??? ? ?????????? ?????? ??????? ?? ????????? TT1N2*

???????? ?????????????? ??????? ?? ???????:

TT1N12 - ?????????? ?????? ?????????????? ?? ??????????, ?????? 0-10V, ?????????? 0-100°C
TT1N21 - ?????????? ?????? ?????????????? ?? ??????????, ?????? 4..20mA, ?????????? 0-50°C