


TT2N ?????????? ?????? ?????????????

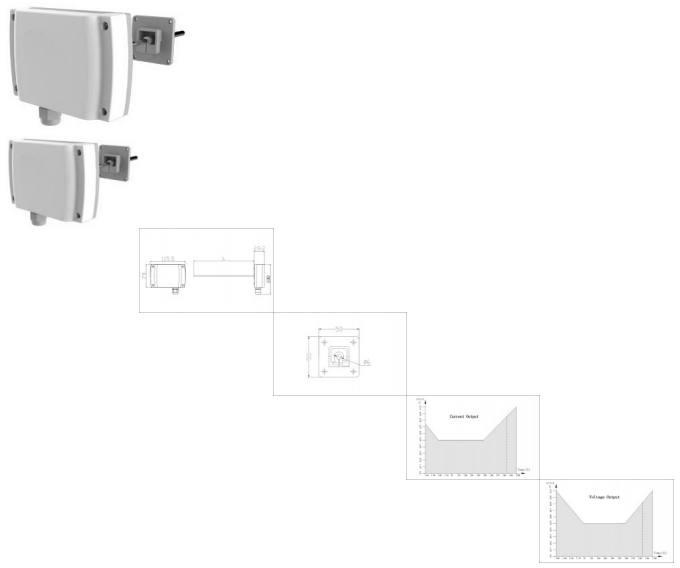

? ?????????? ??????????
4..20mA, 0-10V, 0-5V

?????????: ??? ???? ??????????
?????
5282,12 ???

[?????? ??????? ?? ???????](#)

?????????

[?????????????](#)

- o ?????????? ?????????????? ? ?????????? ??????
- o ?????????????????????? ?????????? ?????????????? ?????????? ?????????? ?????????? ??????????????
- o ?????????? ?????? ?????????? ??????????, ??????? ? ?????????? ??????????, ?????????? ??????????????
- o ?????????? ?? ?????????????????? ? ?????? ??????????????, ?????????????? ? ??????????????????????
- o ?????????? ??????????, ?????????? ??????????
- o ?????? ??????? IP65

[?????????????????](#)

????????:	PT1000, class A
?????????:	?? . ???????
??????:	4..20mA (2?-????????????? ??????????????) ??? 0-10VDC, 0-5VDC
??? . ??????????:	?500? (???), ?2K?(???????. 0-10VDC), ?1K?(???????. 0-5VDC)
?????????:	?±0.5°C, ?? . ??????? ??????????
?????????:	??? 18.5-35VDC (R?????.=500?), 8.5-35VDC (R?????.=0?)
	????????????? 15-35VDC, 15-28VAC
????????? ??????????????:	-30..70°C, 0-95%RH (??? ??????????????)
?????????????? ?????? (?????????):	-40..100°C
?????????????? ??????????:	-30..70°C

?????: ?????????????????? ABS, ?????????????? ??????
???: 142 ?
?????: IP65

??????

??????	TT2N			????????? ??????? ????????????? ? ????????? ?????????
?????		1		0-10VDC
		2		4..20mA (2-?
		E		?????????) 0~5V
?????????		1		0..50°C
		2		0..100°C
		3		-40..60°C
		7		?? ??????
????? ????????			0	75 ??
			1	125 ??
			2	200 ??
			7	?? ??????

* ??? ? ?????????? ?????? ?????????? ?? ?????????? **TT2N2****

????????? ?????????????? ?????????? ?? ?????????:

- TT2N111** - ?????????? ?????? ?????????????, ?????? 0-10V, ?????????? 0..50°C, ?????? 125??
- TT2N222** - ?????????? ?????? ?????????????, ?????? 4..20mA, ?????????? 0..100°C, ?????? 200??